




**LANCIER**  
Hydraulik

GmbH & Co. KG

[www.lancier-hydraulik.de](http://www.lancier-hydraulik.de)

# Spreaders

# *performance Line*

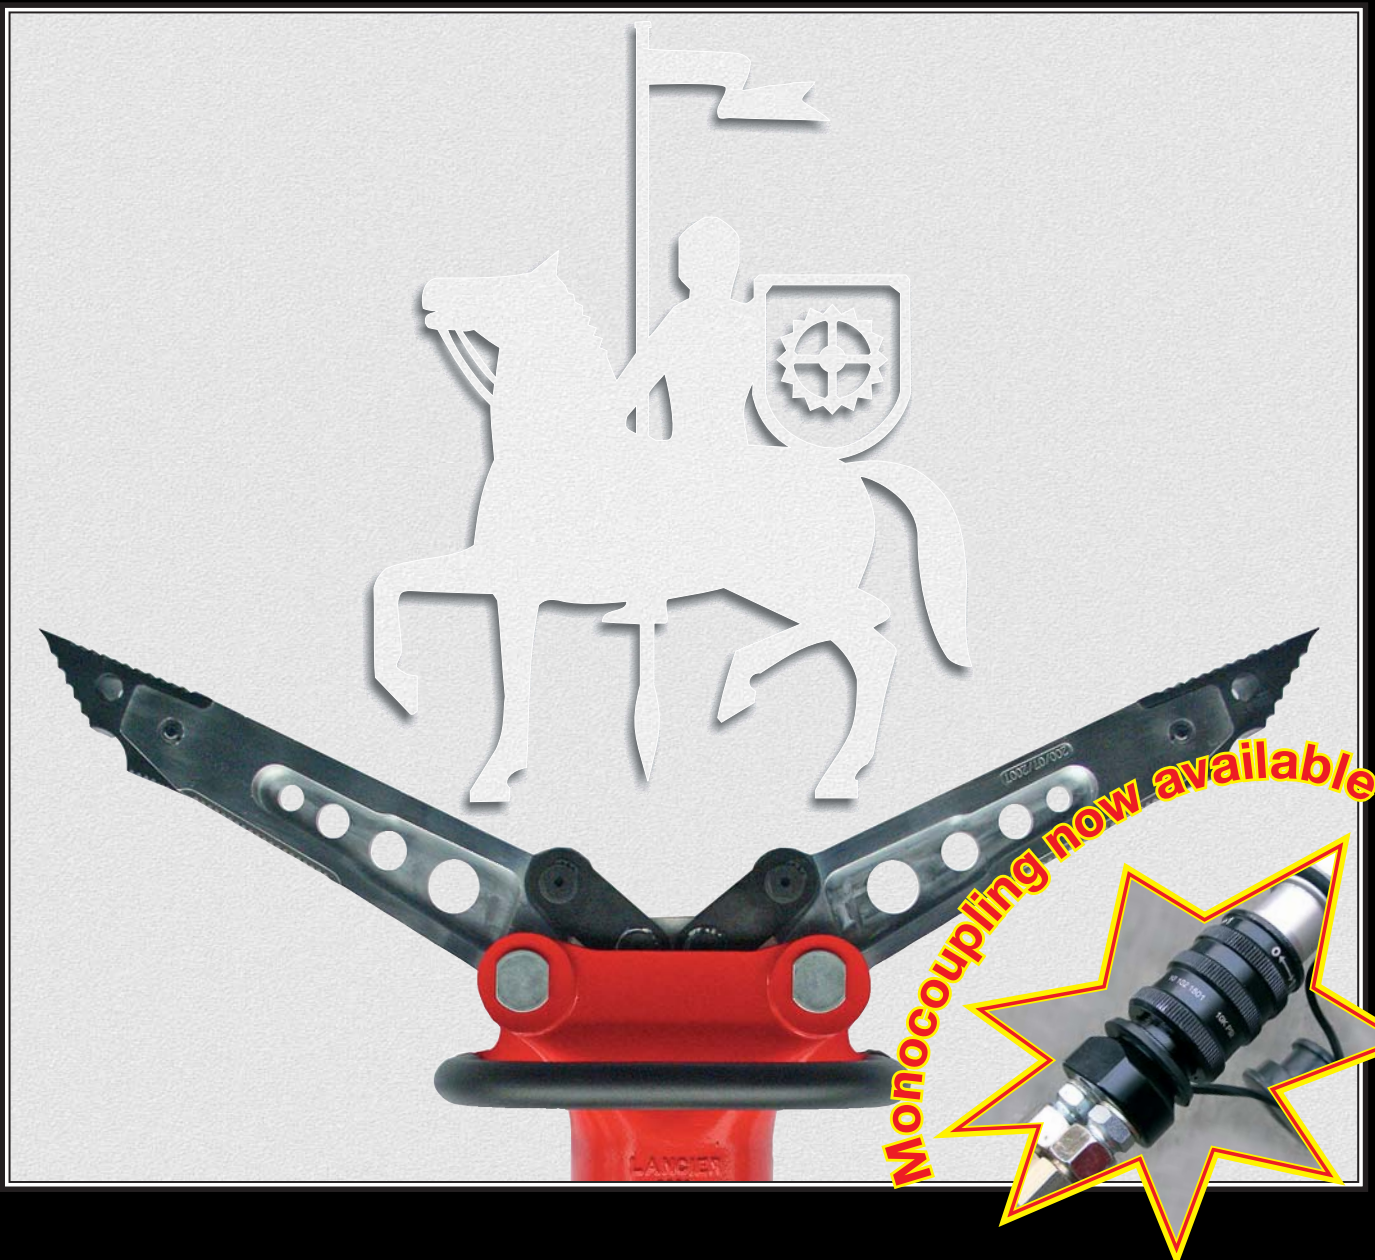

***... when it gets tough !***

# Spreaders



## Type LH-SP-1820



Spreading width	820 mm
Spreading force max.	206.3 kN
Squeezing force max.	53.5 kN
Pulling force max.	45.2 kN
Length	855 mm
Width	290 mm
Height	210 mm
Weight	17.9 kg
<b>Order-No.*</b>	<b>76220</b>



**Performance factor 9.4**  
**Power/Weight ratio 11.5 kN/kg**




\* All specifications refer to operating pressure of 720 bar, without hoses.


Subject to alterations, errors excepted.



## Type LH-SP-1715

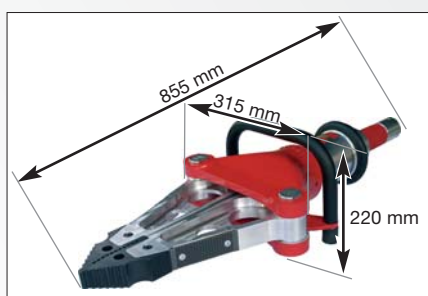

Spreading width	715 mm
Spreading force max.	227.4 kN
Squeezing force max.	59.5 kN
Pulling force max.	53.9 kN
Length	855 mm
Width	315 mm
Height	220 mm
Weight	19.4 kg
<b>Order-No.*</b>	<b>76210</b>

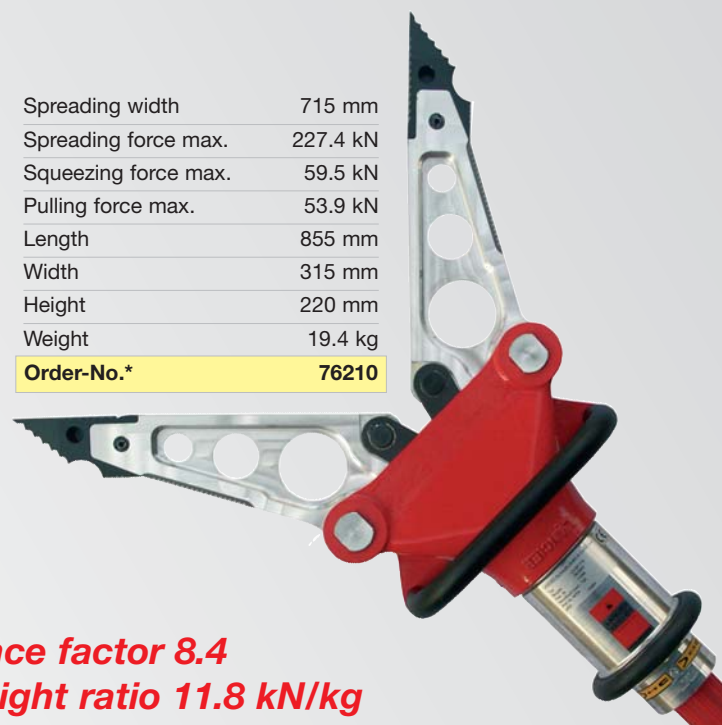

**Performance factor 8.4**  
**Power/Weight ratio 11.8 kN/kg**

## Type LH-SP-1635



Spreading width	635 mm
Spreading force max.	694.2 kN
Squeezing force max.	69.8 kN
Pulling force max.	58.9 kN
Length	765 mm
Width	290 mm
Height	210 mm
Weight	17.4 kg

**Order-No.\*** 76200



**Top!** **Performance factor 25.9**  
**Power/Weight ratio 40.8 kN/kg**

### Special features

- Spreading widths up to 820 mm**
- Spreading force up to 694 kN**
- Operating pressure 630 to 720 bar
- High pressure pigtails, 500 mm long, equipped with kink protection
- Automatic locking, flat face quick connect couplings
- Optional with **Monocoupling**
- Twist grip safety control with integrated over pressurization protection
- Ergonomic handle, non slip, extremely handy
- Exchangeable tips with attachment points for the direct connection of pulling chains
- Optimum power/weight ratio